





FIBATRAY™ GF SERIES GRP Cable Tray

GF Heavy Duty Cable Tray



Ref.	Weight (kg)	Dimensions (mm)	
		W	H
GF73-2	3.0	73	25
GF100-5	4.5	100	40
GF150-5	5.3	150	50
GF200-5	6.3	200	50
GF300-5	8.4	300	50
GF400-6	17.6	400	60


Slot Arrangement - M9 x M20

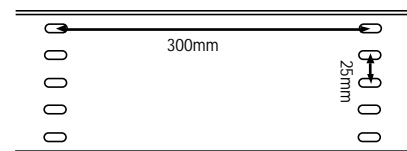

GF CABLE TRAY FITTINGS


REDUCERS

Reducer L/Hand

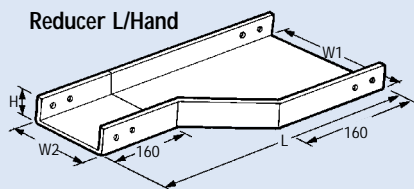

Ref.	Weight (kg)	Dimensions (mm)			
		W1	W2	H	L
GFRL4030	1.5	400	300	60/50	391
GFRL4020	1.4	400	200	60/50	462
GFRL3015	1.2	300	150	50/50	426
GFRL3010	1.1	300	100	50/40	462
GFRL2010	1.0	200	100	50/40	391
GFRL2073	0.9	200	73	50/25	407
GFRL1573	0.9	150	73	50/25	377


Reducer R/Hand

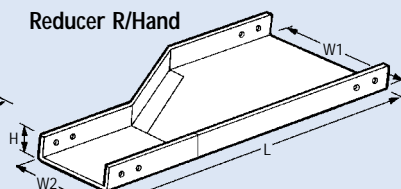

Ref.	Weight (kg)	Dimensions (mm)			
		W1	W2	H	L
GFRR4030	1.5	400	300	60/50	391
GFRR4020	1.4	400	200	60/50	462
GFRR3015	1.2	300	150	50/50	426
GFRR3010	1.1	300	100	50/40	462
GFRR2010	1.0	200	100	50/40	391
GFRR2073	0.9	200	73	50/25	407
GFRR1573	0.9	150	73	50/25	377


SUPPORT

Cover Support

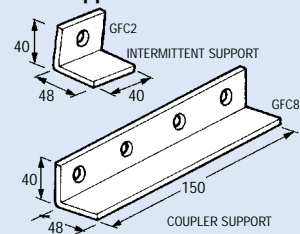


INTERSECTIONS

Equal Tee

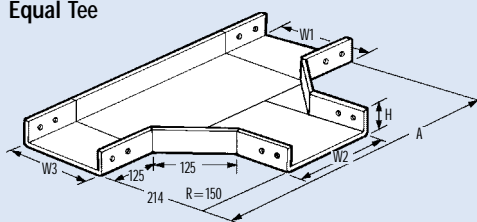

Ref.	Weight (kg)	Dimensions (mm)		
		W	A	H
GFT73-2	1.4	73	500	25
GFT100-5	1.6	100	527	40
GFT150-5	1.8	150	577	50
GFT200-5	2.0	200	627	50
GFT300-5	3.0	300	727	50
GFT400-6	7.0	400	836	60


Equal Cross

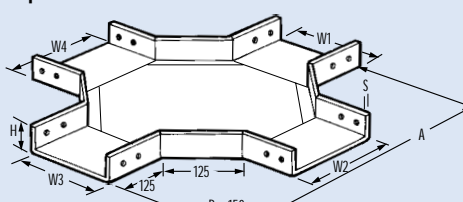

Ref.	Weight (kg)	Dimensions (mm)				
		W	A	H	S	
GFX73-2	1.6	73	500	25	5	
GFX100-5	1.8	100	527	40	5	
GFX150-5	2.1	150	577	50	4	
GFX200-5	2.5	200	627	50	4	
GFX300-5	3.6	300	727	50	4	
GFX400-6	8.0	400	836	60	6	

COUPLER

Straight Coupler

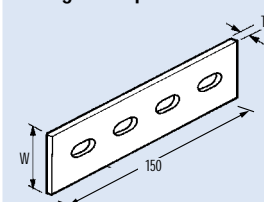

Ref.	Dimensions (mm)		
	T	W	W
GSCC4-G	T=5	W=30	
GSCC4-S	T=2.5	W=25	

● Accessories - Coupler range see page 19

GF Series Cable Tray	Standard Product	Alternative Options* see notes
Material	Class 2 Polyester Resin	Class 1 Modar Resin
Length	3m	6m
Widths	73-600mm (Other widths including 500, 600 and 900mm are available in alternative design) -	
Fittings Construction	316 Stainless Steel bolts and assembly plates	-
Hole Centres	300mm between rows	As required
Radius of Bends	300mm	All radii available
Angle of Bends	45° or 90°	30° or 60°
Hole Size for Bolts	M8	
	<i>To select the standard product use reference numbers shown.</i>	<i>To select an alternative product, add NS to the reference numbers shown and specify desired option(s). See page 37</i>


Additional Information	Page
Couplers & Accessories	12-13
Fasteners	32
Loadings	39
FIBASTRUT™ GRP	
Support Channel	20
● Hole diameter on all ladders is M8 clearance.	
* Alternative Options	
Please contact us for details of any minimum manufacturing quantities, lead times and price premiums which may apply.	



GF CABLE TRAY FITTINGS


BENDS

90° Flat Bend

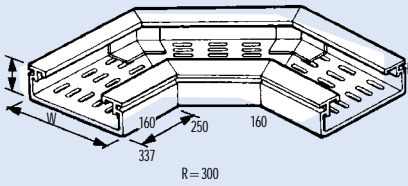

Ref.	Weight (kg)	Dimensions (mm)	
		W	H
GFA73-2	0.8	73	25
GFA100-5	1.2	100	40
GFA150-5	1.5	150	50
GFA200-5	1.8	200	50
GFA300-5	2.6	300	50
GFA400-6	5.7	400	60


45° Flat Bend

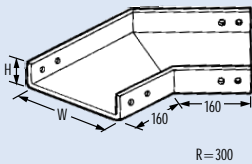

Ref.	Weight (kg)	Dimensions (mm)	
		W	H
GFA7345	0.5	73	25
GFA1045	0.7	100	40
GFA1545	0.8	150	50
GFA2045	1.0	200	50
GFA3045	1.5	300	50
GFA4045	3.1	400	60


RISERS

90° Internal Riser

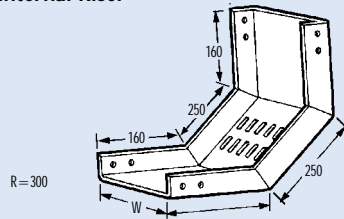


Ref.	Weight (kg)	Dimensions (mm)	
		W	H
GFI73-2	0.8	73	25
GFI100-5	1.2	100	40
GFI150-5	1.5	150	50
GFI200-5	1.8	200	50
GFI300-5	2.6	300	50
GFI400-6	5.7	400	60

45° Internal Riser

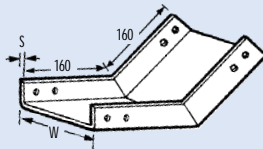


Ref.	Weight (kg)	Dimensions (mm)		
		W	H	S
GFI7345	0.5	73	25	5
GFI1045	0.7	100	40	5
GFI1545	0.8	150	50	4
GFI2045	1.0	200	50	4
GFI3045	1.5	300	50	4
GFI4045	3.1	400	60	6

GFE - 90° External Riser

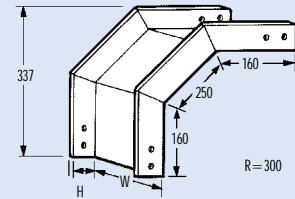

Ref.	Weight (kg)	Dimensions (mm)	
		W	H
GFE73-2	0.7	73	25
GFE100-5	1.1	100	40
GFE150-5	1.4	150	50
GFE200-5	1.7	200	50
GFE300-5	2.5	300	50
GFE400-6	5.5	400	60

GFE - 45° External Riser



Ref.	Weight (kg)	Dimensions (mm)	
		W	H
GFE7345	0.4	73	25
GFE1045	0.6	100	40
GFE1545	0.7	150	50
GFE2045	0.9	200	50
GFE3045	1.4	300	50
GFE4045	3.0	400	60