


Sensor-switched outdoor light

L 20

Stainless steel

EAN 4007841 566814



Function description

Ambience lighting squared. Designer sensor-switched outdoor light L 20, ideal for building entrances and building fronts, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone, stainless-steel trim panel.

Technical specifications

Dimensions (L x W x H)	85 x 230 x 250 mm	Reach, tangential	r = 10 m (157 m ²)
Mains power supply	230 – 240 V / 50 Hz	Photo-cell controller	Yes
Mounting height max.	3,00 m	Twilight setting	2 – 2000 lx
Sensor Technology	passive infrared	Time setting	8 s – 35 Min.
Output	60 W	Basic light level function	No
Interconnection	No	Soft light start	No
With lamp	No	Impact resistance	IK07
Lamp	All-purpose lamp	IP-rating	IP44
Base	E27	Protection class	II
With motion detector	Yes	Ambient temperature	-20 – 40 °C
Detection angle	180 °	Housing material	Stainless steel
Sneak-by guard	Yes	Cover material	Plastic, opal
Capability of masking out individual segments	Yes	Manufacturer's Warranty	3 years
Electronic scalability	No	Settings via	Potentiometers
Mechanical scalability	No	Version	Stainless steel
Reach, radial	r = 3 m (14 m ²)	PU1, EAN	4007841566814

Accessories

EAN 4007841 006334 Replacement shade for L 20

Sensor-switched outdoor light


L 20

Stainless steel

EAN 4007841 566814



Detection Zone

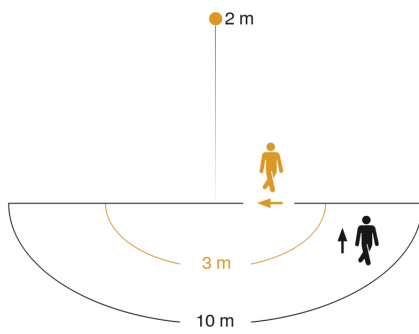

Mögliche Montagehöhe: 1,80 m – 3,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

