pagoda

PAGODA's stylish curve is a clean new look for your conference room. With easy access to AC power, USB charging and data/AV connections, powering through your next meeting will be a breeze.

Easy to install, PAGODA mounts via a standard 3.15" (80mm) grommet hole, eliminating challenging surface cuts.

The high quality brushed stainless-steel finish makes a statement, setting it apart from the run of the mill conference power options.

Take it up a notch and specify PAGODA with one of three LED accent lighting options to really separate your space from the crowd.

PAGODA provides eight sockets for any combination of AC power or USB charging as well as six keystone apertures for data/AV connections three per end. Blanks are available if data is not required.

UNIQUE SELLING POINTS:

- Stylish on-surface design
- 3.15" (80mm) Through desk mounting
- Choice of AC power sockets & data solutions
- LED accent lighting options
- Easy to clean and maintain

Available Modular Components:

US Nema	US Nema TR	TUF-R A+C²⁵ᵂ	Schuko	UK fused/Unfused
Swiss	French/Belgian	Indian	Italian	Chinese Combi

Data Options

Keystone RJ45 Cat5e/Cat6	Keystone RCA/Audio	Keystone USB 2.0/3.0	Keystone HDMI
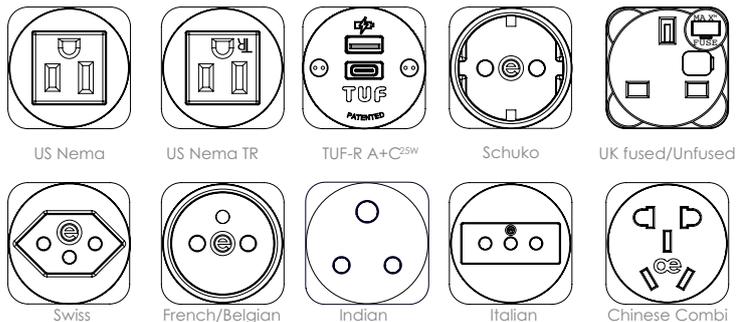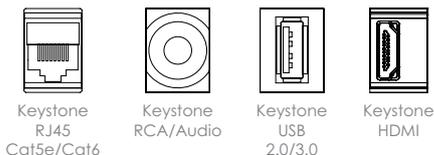
See www.oeelectrics.com for full list of available modular components.

Dimensions:

Keystone apertures

0.04-1.38"
(1-35mm)

3.11"
(79mm)

4.25"
(108mm)

11.90"
(302.1mm)

13.78"
(350mm)
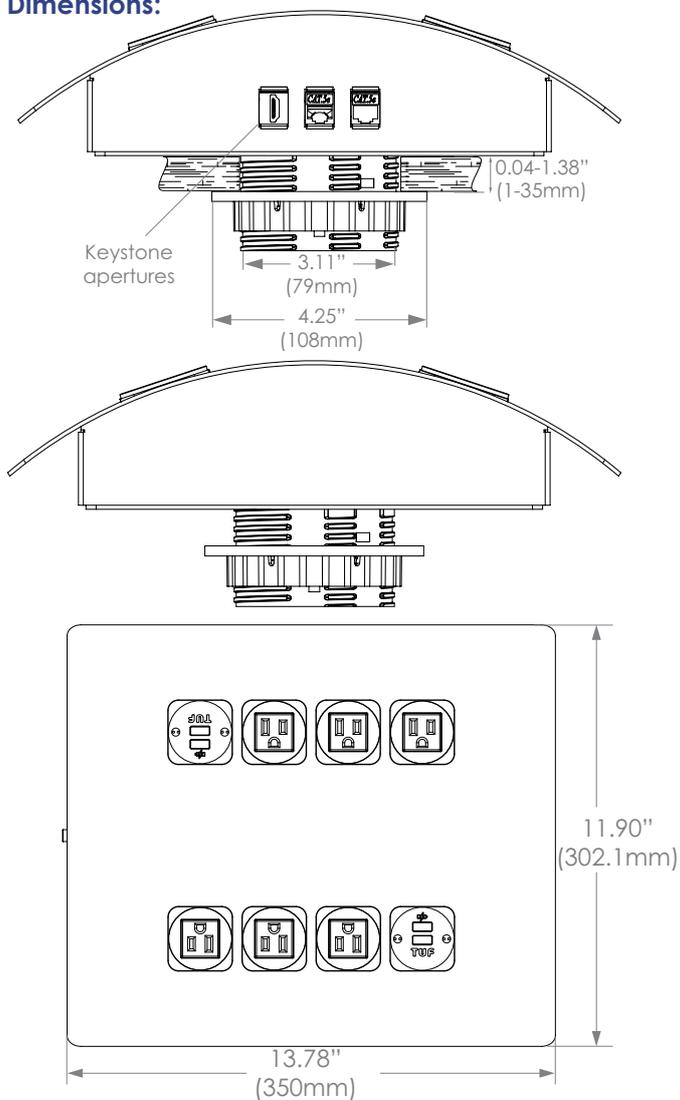
Cutout Dimensions:

3.15"
(80mm)

Configuration:
Populate PAGODA's eight apertures with any combination of:
- 53mm power sockets, or
- TUF-R A+C 25W USB charger, or
- Data/AV

Construction:
Body – Steel
Top frame – Steel

Colors:
Standard – Brushed stainless steel top plate, & black fascias, or
White top plate, & gray fascia, or all black
(NEMA TR sockets - black only)

Power and Cord:
PAGODA is wired as standard with a 32" 14/3 SJT cord to a male GST connector to be used with OE's pluggable GST system.
Available by special order wired with a NEMA 5-15 cord and plug.
A starter cord is required for GST option: 72" or 108" 14/3 SJT cord with female GST connector, NEMA plug, and Integral OCP standard.

Data:
As well as soft-wired power, PAGODA can accommodate soft wired data.
Using high quality in-line couplers with interchangeable system leads (or punch down sockets for site installed data) data cables can be changed "on-site" to suit individual office desk layout.
Where keystone sockets are ordered, our unique range of keystone adapters allow data outlets to sit flush and be color coded for easy circuit identification.

LED accent lighting:
Optional red, blue or green 12V LED strips with internal LED driver.

Installation:
PAGODA fits into a standard 3.15" (80mm) grommet hole in table tops up to 1.38" (35mm) deep, using the supplied clamp 80 kit. Silicone rubber feet prevent damage to table surfaces.

Quality and Testing:
All PAGODA units are manufactured using ISO9001 quality controlled components and practices and are 100% inspected before shipment.
- Visual: Configuration and appearance
- Power sockets: Continuity, polarity, insulation & grounding
- TUF-R A+C 25W USB charger: Fully function tested, as well as 4 hour "full-load" soak tested"
- Data & AV: 100% continuity tested; all orders are batch tested for performance compliance

"we test every pin in every socket in every module"

Certifications:
cETLus Listed - UL962A/CSA22.2
International certifications available on request.